

# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH  
EN 15804+A2+AC,  
ISO 14025,  
ISO 21930

## GEBERIT SILENT-DB20 FITTING


Geberit International AG

### EPD HUB, HUB-1813

Published: 20 August 2024

Last updated: 20 August 2024

Valid until: 20 August 2029

Created with One Click LCA 



**KNOW  
HOW**  
INSTALLED

## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	Geberit International AG
Address	Schachenstrasse 77, 8645 Jona, Switzerland
Contact details	sustainability@geberit.com
Website	www.geberit.com

### EPD STANDARDS, SCOPE AND VERIFICATION

Programme operator	EPD Hub, hub@epdhub.com
Reference standards	EN 15804+A2:2019+AC:2021 ISO 14025 ISO 21930
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Construction product
Category of EPD	Third-party-verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, and modules C1-C4 and D
EPD author	Georg Nauenburg
EPD verification	Independent verification of this EPD and data according to ISO 14025 <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
EPD verifier	Magaly González Vázquez, as an authorised verifier acting for EPD Hub Limited

The manufacturer retains the sole ownership of, liability and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

### PRODUCT

Product name	Geberit Silent-db20 fitting
Additional labels	-
Product reference	310.450.14.1
Place of production	Jona, Switzerland
Period for data	2023
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	-

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 kg Geberit Silent-db20 fitting
Declared unit mass	1 kg
GWP-fossil, A1-A3 (kgCO <sub>2</sub> e)	1.19
GWP-total, A1-A3 (kgCO <sub>2</sub> e)	1.07
Secondary material, inputs (%)	0.15
Secondary material, outputs (%)	45
Total energy use, A1-A3 (kWh)	9.47
Total water use, A1-A3 (m <sup>3</sup> e)	0.15

## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Geberit wants to play a leading role in the transition towards a sustainable sanitary industry. Sustainability has formed an integral component of the corporate strategy for more than 30 years. The Geberit Group has a group ISO certificate in accordance with ISO 9001 (quality), ISO 14001 (environment) and ISO 45001 (occupational health and safety). The company prepared life cycle assessments for key products from an early stage, and eco-design has been an integral part of the product development process since 2007. You can find comprehensive information on sustainability in the current annual report or at <https://www.geberit.com/sustainability>

### PRODUCT DESCRIPTION

The Geberit Silent-db20 is the highly sound-insulating drainage system with lengthways non-positive connection options. In addition to the legally prescribed sound insulation requirements, the Geberit Silent-db20 also guarantees increased standard requirements for sound insulation. Geberit Silent-db20 is suitable for all unpressurized drainage installations even for buildings with increased sound insulation requirements, e.g. residential buildings, hospitals, hotels or office buildings. It is available in the dimensions d56 – 160 mm.

The Geberit Silent db20 drainage system uses mineral-reinforced PE-S2 plastic. It increases the weight of the pipes and fittings. This reduces natural vibrations and sound is effectively damped.

Intended use:

- For building drainage
- For buildings with increased sound insulation requirements
- Conventional roof drainage system

Further information is available in the local online product catalogue.

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass %	Material origin
Metals	0	-
Minerals	55	Europe
Fossil materials	45	Europe
Bio-based materials	0	-

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	-
Biogenic carbon content in packaging, kg C	0.034

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 kg Geberit Silent-db20 fitting
Mass per declared unit	1 kg
Functional unit	-
Reference service life	50 years

### REACH – SUBSTANCES OF VERY HIGH CONCERN (SVHC)

The product does not contain any REACH SVHC substances in amounts greater than 0.1 % (1,000 ppm).

# PRODUCT LIFE CYCLE

## SYSTEM BOUNDARY

This EPD covers the life cycle modules listed in the following table.

Product stage			Construction stage		Use stage								End-of-life stage				Beyond system boundaries	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

MND = Modules not declared; MNR = Modules not relevant.

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. The energy used by machines, and handling of waste formed in the production processes at the manufacturing facilities are also included in this stage. Furthermore, the study considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The raw materials for the product are high-density polyethylene (PE-HD) and barium sulphate. The share of external secondary materials in the product is 0 %. The product is free from organic halogens in accordance with EN 50642. For the supply of raw materials, the total input of raw materials was mapped with corresponding European data. Further information on supply chain sustainability and material purchasing can be found in Geberit Annual Report.

The transports from suppliers to Geberit are modelled based on material-class-specific transport distances. The individual transport distances of

each supplier are averaged according to the corresponding sales volumes. All A2 transports are carried out by lorry. Transport by rail, air and sea freight is not considered due to lack of relevance. On average, the transport distance from suppliers of raw and semifinished materials is about 560 km.

The compounding of raw materials takes place in the production site in Villadose (IT). The production and packaging of the Geberit Silent-db20 fitting takes place at the production site in Jona (CH). The Geberit plants are certified according to ISO 9001, ISO 14001 and ISO 45001. The current Group ISO certificate can be downloaded from <https://www.geberit.com>. The main production process is injection moulding. A high share of production waste from plastic injection moulding is recycled internally. The sources of electricity consumed for the manufacturing process are modelled for the Villadose plant with around 40 % renewable (remaining Italian average mix) and in the Jona plant 100 % renewable sources. The consumption of additives is negligible, i.e. it falls under the cut-off rules.

The production and provision of packaging material are modelled in A3. The finished product is packaged with cardboard. Other packaging materials fall under the cut-off rules.

The manufacturing waste is assumed to be sent to the closest waste disposal facilities by lorry, which is estimated to be 50 km away.

## TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts resulting from final products delivery to construction site (A4) cover direct fuel exhaust emissions and environmental impacts of fuel production, as well as related infrastructure emissions.

Transport from Geberit to customers within Europe is carried out by logistics partners via the modern, efficient Logistics Centre in Pfullendorf (DE) which is certified according to ISO 9001, ISO 14001 and ISO 45001. Distribution to countries outside Europe is not taken into account due to lack of relevance.

The following information has been considered:

- The majority of transports within Europe are carried out by lorry. Therefore, intercontinental transport by sea and air is not considered.
- The majority of vehicles in use are > 32 t Euro 6 class (> 85 %).
- The average transport distance in Europe from the production site to the Logistics Centre and to the consumer is approximately 590 km.

Further information on logistics and how we consider ecological aspects of transport can be found in the Geberit Annual Report.

In A5, there are no relevant environmental impacts during installation. Therefore, only the preparation of the waste treatment of packaging materials is taken into account in A5. Cardboard is assumed to be fully recycled.

### PRODUCT USE AND MAINTENANCE (B1-B7)

The product use and maintenance phases are not considered. Air, soil and water impacts during the use phase have not been studied.

The product does not consume any electricity in use and has no moving parts. Periodic maintenance is not necessary.

The resistance to ageing depends on the strength of the mechanical, thermal and chemical stress, the resistance of the material and the wall thickness of the fitting and its proper functioning. Under conditions normally encountered in waste water fittings in buildings, Geberit Silent-db20 has a service life of at least 50 years.


### PRODUCT END-OF-LIFE (C1-C4, D)

As the consumption of energy and natural resources is negligible for disassembling the end-of-life product, the impacts of demolition are assumed to be zero (C1). The end-of-life product is assumed to be sent to the closest waste disposal facilities by lorry, which is estimated to be 50 km away (C2). It is generally assumed that all waste is collected and professionally separated after demolition on the construction site. The

type of waste treatment is determined on the basis of the material class. Plastics are disposed of in the municipal waste incineration plant. Although the plastic components of the product are basically suitable for recycling due to their material properties, they are conservatively modelled with thermal energy recovery. The mineral material of the product is assumed to be disposed of in the inert material landfill. The product is not biodegradable.

In module D, the thermal treatment of plastic generates benefits. This covers energy and heat produced from the incineration in a waste incineration plant. Waste of packaging materials in A5 have benefits and loads that are also considered.

# MANUFACTURING PROCESS

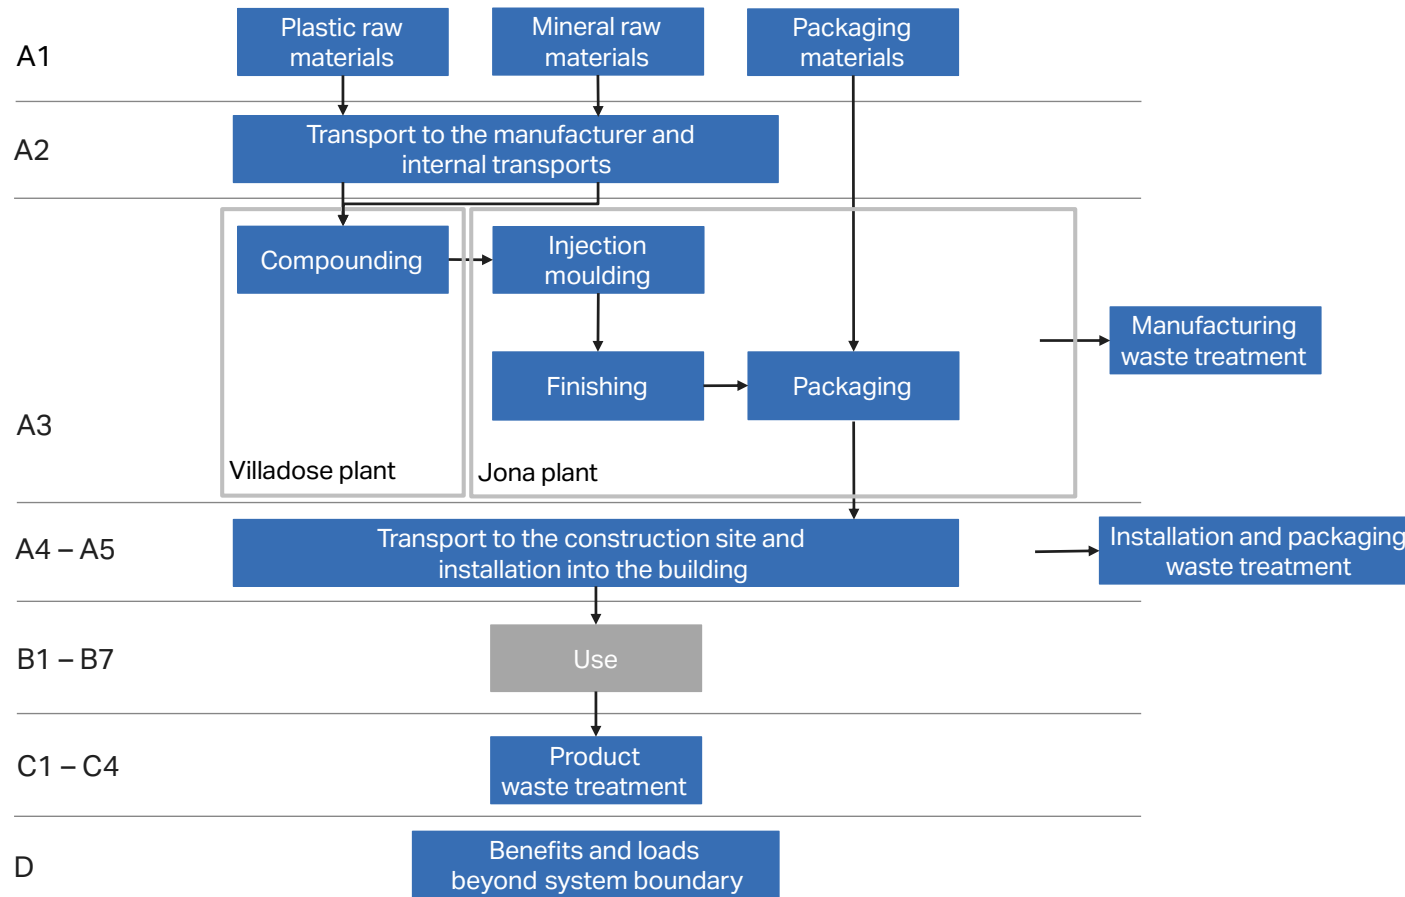

# LIFE CYCLE ASSESSMENT

## CUT-OFF CRITERIA

The study does not exclude any modules or processes that are stated as mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes for which data is available are included in the calculation. There is no neglected unit process with more than 1 % of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5 % of energy use or mass.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are made as per the reference standards and the applied PCR. In this study, allocations have been made in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	No allocation
Manufacturing energy and waste	Allocated by mass or volume

## AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	-
Variation in GWP-fossil for A1-A3	-

This EPD is product and factory-specific and does not contain average calculations. Primary data refers to the manufacturing site in Jona (CH). The data of a Geberit Silent-db20 bend PE-S2 45G d110 L10/6 (article number 310.450.14.1) was chosen as a reference product. The results can be scaled linearly for articles listed in the Annex.

## LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using the One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards, ISO 14040 and ISO 14044. Ecoinvent 3.8 and One Click LCA databases were used as sources of environmental data.

# ENVIRONMENTAL IMPACT DATA

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP <sup>1)</sup> -total	kg CO <sub>2</sub> e	9,13E-01	1,11E-01	4,83E-02	1,07E+00	5,75E-02	1,25E-01	MND	MND	MND	MND	MND	MND	MND	MNR	4,59E-03	1,44E+00	2,85E-03	-1,02E+00
GWP-fossil	kg CO <sub>2</sub> e	9,11E-01	1,11E-01	1,71E-01	1,19E+00	5,75E-02	2,53E-03	MND	MND	MND	MND	MND	MND	MND	MNR	4,58E-03	1,44E+00	2,90E-03	-1,02E+00
GWP-biogenic	kg CO <sub>2</sub> e	1,65E-03	0,00E+00	-1,23E-01	-1,21E-01	0,00E+00	1,23E-01	MND	MND	MND	MND	MND	MND	MND	MNR	0,00E+00	-1,60E-03	-4,58E-05	0,00E+00
GWP-luluc <sup>2)</sup>	kg CO <sub>2</sub> e	2,77E-04	4,31E-05	5,14E-04	8,34E-04	2,23E-05	1,47E-06	MND	MND	MND	MND	MND	MND	MND	MNR	1,74E-06	5,03E-05	2,73E-06	-2,80E-04
Ozone depletion pot.	kg CFC-11e	3,21E-08	2,61E-08	2,06E-08	7,88E-08	1,35E-08	1,51E-10	MND	MND	MND	MND	MND	MND	MND	MNR	1,07E-09	2,64E-09	1,17E-09	-5,39E-08
Acidification potential	mol H <sup>+</sup> e	3,38E-03	3,62E-04	8,19E-04	4,56E-03	1,87E-04	9,00E-06	MND	MND	MND	MND	MND	MND	MND	MNR	1,70E-05	3,01E-04	2,72E-05	-7,93E-03
EP <sup>3)</sup> -freshwater	kg Pe	1,39E-05	9,41E-07	7,92E-06	2,28E-05	4,87E-07	6,46E-08	MND	MND	MND	MND	MND	MND	MND	MNR	3,82E-08	1,13E-06	3,04E-08	-5,67E-05
EP-marine	kg Ne	5,95E-04	7,95E-05	2,82E-04	9,56E-04	4,11E-05	2,48E-06	MND	MND	MND	MND	MND	MND	MND	MNR	4,43E-06	1,20E-04	9,43E-06	-9,27E-04
EP-terrestrial	mol Ne	6,53E-03	8,82E-04	2,07E-03	9,48E-03	4,57E-04	2,26E-05	MND	MND	MND	MND	MND	MND	MND	MNR	4,90E-05	1,28E-03	1,04E-04	-1,08E-02
POCP <sup>4)</sup> ('smog')	kg NMVOCe	3,11E-03	3,42E-04	4,96E-04	3,94E-03	1,77E-04	6,87E-06	MND	MND	MND	MND	MND	MND	MND	MNR	1,70E-05	3,34E-04	3,02E-05	-2,99E-03
ADP-minerals & metals	kg Sbe	1,17E-05	2,70E-07	7,39E-07	1,27E-05	1,40E-07	3,02E-08	MND	MND	MND	MND	MND	MND	MND	MNR	1,10E-08	4,86E-07	6,66E-09	-7,72E-07
ADP <sup>5)</sup> -fossil resources	MJ	3,18E+01	1,74E+00	2,38E+00	3,59E+01	9,00E-01	1,98E-02	MND	MND	MND	MND	MND	MND	MND	MNR	7,05E-02	3,51E-01	7,94E-02	-1,24E+01
Water use	m <sup>3</sup> e depr.	1,10E+00	7,76E-03	5,28E+00	6,39E+00	4,02E-03	4,73E-04	MND	MND	MND	MND	MND	MND	MND	MNR	3,15E-04	4,91E-02	2,52E-04	-1,78E-01

1) GWP = Global warming potential; 2) luluc = land use and land use change; 3) EP = Eutrophication potential; 4) POCP = Photochemical ozone creation potential; 5) ADP = Abiotic depletion potential

## ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	3,64E-08	1,26E-08	9,55E-09	5,86E-08	6,54E-09	1,50E-10	MND	MND	MND	MND	MND	MND	MND	MNR	5,25E-10	4,14E-09	5,49E-10	-6,87E-08
Ionizing radiation	kBq U235e	6,22E-02	8,33E-03	2,10E-02	9,15E-02	4,31E-03	2,32E-04	MND	MND	MND	MND	MND	MND	MND	MNR	3,37E-04	2,65E-03	3,59E-04	-1,58E-01
Ecotoxicity, freshwater	CTUe	5,75E+00	1,55E+00	2,54E+00	9,83E+00	8,01E-01	7,92E-02	MND	MND	MND	MND	MND	MND	MND	MNR	6,30E-02	9,94E-01	5,18E-02	-2,22E+01
Human toxicity, cancer	CTUh	2,87E-10	3,78E-11	1,27E-10	4,52E-10	1,96E-11	4,46E-12	MND	MND	MND	MND	MND	MND	MND	MNR	1,54E-12	1,50E-10	1,30E-12	-3,20E-10
Human tox. non-cancer	CTUh	6,51E-09	1,49E-09	1,91E-09	9,91E-09	7,71E-10	5,18E-11	MND	MND	MND	MND	MND	MND	MND	MNR	6,14E-11	2,66E-09	3,39E-11	-1,03E-08
SQP <sup>6)</sup>	-	1,06E+00	2,00E+00	3,44E+00	6,51E+00	1,04E+00	1,65E-02	MND	MND	MND	MND	MND	MND	MND	MNR	8,11E-02	4,70E-01	1,70E-01	-1,06E+01

6) SQP = Potential soil quality index



## USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER <sup>7)</sup> as energy	MJ	5,43E-01	1,96E-02	1,67E+01	1,73E+01	1,01E-02	1,84E-03	MND	MND	MND	MND	MND	MND	MND	MNR	7,93E-04	2,95E-02	6,90E-04	-2,37E+00
Renew. PER as material	MJ	0,00E+00	0,00E+00	1,06E+00	1,06E+00	0,00E+00	-1,06E+00	MND	MND	MND	MND	MND	MND	MND	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	5,43E-01	1,96E-02	1,78E+01	1,83E+01	1,01E-02	-1,06E+00	MND	MND	MND	MND	MND	MND	MND	MNR	7,93E-04	2,95E-02	6,90E-04	-2,37E+00
Non-ren. PER as energy	MJ	1,27E+01	1,74E+00	2,37E+00	1,68E+01	9,00E-01	1,98E-02	MND	MND	MND	MND	MND	MND	MND	MNR	7,05E-02	3,51E-01	7,94E-02	-1,24E+01
Non-ren. PER as material	MJ	1,90E+01	0,00E+00	-6,73E-02	1,90E+01	0,00E+00	-8,59E-03	MND	MND	MND	MND	MND	MND	MND	MNR	0,00E+00	-1,90E+01	0,00E+00	0,00E+00
Total use of non-ren. PER	MJ	3,18E+01	1,74E+00	2,30E+00	3,58E+01	9,00E-01	1,12E-02	MND	MND	MND	MND	MND	MND	MND	MNR	7,05E-02	-1,86E+01	7,94E-02	-1,24E+01
Secondary materials	kg	1,48E-03	4,82E-04	8,26E-02	8,45E-02	2,50E-04	4,49E-05	MND	MND	MND	MND	MND	MND	MND	MNR	1,95E-05	1,69E-03	1,67E-05	2,57E-02
Renew. secondary fuels	MJ	1,46E-05	4,86E-06	5,87E-03	5,89E-03	2,52E-06	2,03E-07	MND	MND	MND	MND	MND	MND	MND	MNR	1,97E-07	1,31E-05	4,36E-07	-8,69E-06
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m <sup>3</sup>	2,68E-02	2,24E-04	1,23E-01	1,50E-01	1,16E-04	1,28E-05	MND	MND	MND	MND	MND	MND	MND	MNR	9,11E-06	3,66E-04	8,69E-05	-9,63E-03

7) PER = Primary energy resources

## END-OF-LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	2,17E-02	2,29E-03	1,29E-02	3,68E-02	1,19E-03	2,17E-04	MND	MND	MND	MND	MND	MND	MND	MNR	9,31E-05	4,85E-03	0,00E+00	-7,82E-02
Non-hazardous waste	kg	6,00E-01	3,76E-02	2,51E-01	8,89E-01	1,95E-02	4,54E-03	MND	MND	MND	MND	MND	MND	MND	MNR	1,53E-03	5,20E-01	5,50E-01	-3,89E+00
Radioactive waste	kg	2,40E-05	1,17E-05	7,54E-06	4,33E-05	6,06E-06	1,05E-07	MND	MND	MND	MND	MND	MND	MND	MNR	4,73E-07	1,02E-06	0,00E+00	-5,69E-05

## END-OF-LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,30E-02	MND	MND	MND	MND	MND	MND	MND	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy rec.	kg	0,00E+00	0,00E+00	1,79E-03	1,79E-03	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	MNR	0,00E+00	4,50E-01	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	MNR	0,00E+00	1,39E+01	0,00E+00	0,00E+00

### ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global warming pot.	kg CO <sub>2</sub> e	8,65E-01	1,10E-01	1,74E-01	1,15E+00	5,69E-02	3,20E-03	MND	MND	MND	MND	MND	MND	MND	MNR	4,54E-03	1,44E+00	2,84E-03	-1,00E+00
Ozone depletion pot.	kg CFC-11e	2,68E-08	2,07E-08	1,77E-08	6,52E-08	1,07E-08	1,25E-10	MND	MND	MND	MND	MND	MND	MND	MNR	8,45E-10	2,29E-09	9,27E-10	-4,40E-08
Acidification	kg SO <sub>2</sub> e	2,82E-03	2,93E-04	6,25E-04	3,74E-03	1,52E-04	7,11E-06	MND	MND	MND	MND	MND	MND	MND	MNR	1,35E-05	2,21E-04	2,06E-05	-6,78E-03
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	7,05E-04	6,41E-05	3,99E-04	1,17E-03	3,32E-05	9,26E-06	MND	MND	MND	MND	MND	MND	MND	MNR	3,01E-06	3,62E-04	4,44E-06	-2,00E-03
POCP ('smog')	kg C <sub>2</sub> H <sub>4</sub> e	2,74E-04	1,35E-05	3,46E-05	3,22E-04	7,00E-06	8,42E-07	MND	MND	MND	MND	MND	MND	MND	MNR	5,72E-07	9,65E-06	8,63E-07	-2,89E-04
ADP-elements	kg Sbe	1,17E-05	2,63E-07	6,30E-07	1,26E-05	1,36E-07	3,00E-08	MND	MND	MND	MND	MND	MND	MND	MNR	1,06E-08	4,76E-07	6,56E-09	-7,74E-07
ADP-fossil	MJ	3,17E+01	1,74E+00	2,37E+00	3,59E+01	9,00E-01	1,98E-02	MND	MND	MND	MND	MND	MND	MND	MNR	7,05E-02	3,51E-01	7,94E-02	-1,24E+01

## ANNEX: ARTICLES COVERED BY THIS EPD

Article number	Product description	Net weight [kg per item]	GWP-fossil, A1-A3 [kg CO <sub>2</sub> e/item]
305.150.14.1	bend PE-S2 15G d56 L7.5/4.5	0.115	0.14
306.150.14.1	bend PE-S2 15G d63 L7.5/5	0.134	0.16
307.150.14.1	bend PE-S2 15G d75 L8/5	0.192	0.23
308.150.14.1	bend PE-S2 15G d90 L10/5.5	0.410	0.49
310.150.14.1	bend PE-S2 15G d110 L10/6	0.555	0.66
312.150.14.1	bend PE-S2 15G d135 L11.5/6.5	0.791	0.94
315.150.14.1	bend PE-S2 15G d160 L13/7.5	1.235	1.47
305.300.14.1	bend PE-S2 30G d56 L7.5/4.5	0.111	0.13
306.300.14.1	bend PE-S2 30G d63 L7.5/5	0.134	0.16
307.300.14.1	bend PE-S2 30G d75 L8/5	0.192	0.23
308.300.14.1	bend PE-S2 30G d90 L10/6.5	0.432	0.51
310.300.14.1	bend PE-S2 30G d110 L10/6	0.555	0.66
312.300.14.1	bend PE-S2 30G d135 L11.5/6.5	0.798	0.95
315.300.14.1	bend PE-S2 30G d160 L15.7/15.7	1.940	2.31
305.450.14.1	bend PE-S2 45G d56 L7.5/4.5	0.110	0.13
306.450.14.1	bend PE-S2 45G d63 L7.5/5	0.136	0.16
307.450.14.1	bend PE-S2 45G d75 L8/5	0.183	0.22
308.450.14.1	bend PE-S2 45G d90 L10/5.5	0.400	0.48
310.450.14.1	bend PE-S2 45G d110 L10/6	0.566	0.67
312.450.14.1	bend PE-S2 45G d135 L11.5/7.7	0.845	1.01
315.450.14.1	bend PE-S2 45G d160 L15.5/9.5	1.516	1.80
305.670.14.1	bend PE-S2 67G d56 L7.5/5.5	0.122	0.15
307.670.14.1	bend PE-S2 67G d75 L8/6	0.200	0.24
308.670.14.1	bend PE-S2 67G d90 L10/7	0.438	0.52
310.670.14.1	bend PE-S2 67G d110 L10/8	0.610	0.73
305.600.14.1	bend PE-S2 60G d56 L9.1 welded	0.179	0.21
306.600.14.1	bend PE-S2 60G d63 L9.7 welded	0.212	0.25
307.600.14.1	bend PE-S2 60G d75 L11.3 welded	0.331	0.39
308.600.14.1	bend PE-S2 60G d90 L13.8 welded	0.735	0.87
310.600.14.1	bend PE-S2 60G d110 L14.6 welded	1.014	1.21
312.600.14.1	bend PE-S2 60G d135 L16.9 welded	1.445	1.72

Article number	Product description	Net weight [kg per item]	GWP-fossil, A1-A3 [kg CO <sub>2</sub> e/item]
305.885.14.1	bend PE-S2 88.5G d56 L11 welded	0.194	0.23
306.885.14.1	bend PE-S2 88.5G d63 L11.5 welded	0.233	0.28
307.885.14.1	bend PE-S2 88.5G d75 L12.8 welded	0.346	0.41
308.885.14.1	bend PE-S2 88.5G d90 L15.6 welded	0.745	0.89
310.885.14.1	bend PE-S2 88.5G d110 L16.9 welded	1.054	1.25
312.885.14.1	bend PE-S2 88.5G d135 L18.6 welded	1.482	1.76
315.885.14.1	bend PE-S2 88.5G d160 L22.5 welded	2.514	2.99
305.880.14.1	bend PE-S2 88.5G d56 L6.5	0.114	0.14
306.880.14.1	bend PE-S2 88.5G d63 L7	0.147	0.17
307.880.14.1	bend PE-S2 88.5G d75 L7.5	0.201	0.24
308.880.14.1	bend PE-S2 88.5G d90 L8	0.384	0.46
310.880.14.1	bend PE-S2 88.5G d110 L9.5	0.608	0.72
312.880.14.1	bend PE-S2 88.5G d135 L11.5	0.942	1.12
308.014.14.1	bend PE-S2 45G d90 L21/5.5 welded	0.700	0.83
310.014.14.1	bend PE-S2 45G d110 L21/6 welded	0.970	1.15
312.014.14.1	bend PE-S2 45G d135 L22.5/7.7 welded	1.351	1.61
306.008.14.1	bend PE-S2 90G d63 L21/5	0.253	0.30
310.008.14.1	bend PE-S2 90G d110 L27/10	1.189	1.41
305.054.14.1	branch fitting PE-S2 45G d56/56	0.232	0.28
306.054.14.1	branch fitting PE-S2 45G d63/56	0.280	0.33
306.064.14.1	branch fitting PE-S2 45G d63/63	0.294	0.35
307.054.14.1	branch fitting PE-S2 45G d75/56	0.366	0.44
307.064.14.1	branch fitting PE-S2 45G d75/63	0.391	0.47
307.074.14.1	branch fitting PE-S2 45G d75/75	0.406	0.48
308.054.14.1	branch fitting PE-S2 45G d90/56	0.588	0.70
308.064.14.1	branch fitting PE-S2 45G d90/63	0.710	0.84
308.074.14.1	branch fitting PE-S2 45G d90/75	0.730	0.87
308.084.14.1	branch fitting PE-S2 45G d90/90	0.839	1.00
310.054.14.1	branch fitting PE-S2 45G d110/56	1.000	1.19
310.064.14.1	branch fitting PE-S2 45G d110/63	1.025	1.22
310.074.14.1	branch fitting PE-S2 45G d110/75	1.044	1.24

Article number	Product description	Net weight [kg per item]	GWP-fossil, A1-A3 [kg CO <sub>2</sub> e/item]
310.084.14.1	branch fitting PE-S2 45G d110/90	1.154	1.37
310.104.14.1	branch fitting PE-S2 45G d110/110	1.244	1.48
312.104.14.1	branch fitting PE-S2 45G d135/110	1.913	2.28
315.144.14.1	branch fitting PE-S2 45G d160/160	3.308	3.94
315.104.14.1	branch fitting PE-S2 45G d160/110 welded	3.334	3.97
315.124.14.1	branch fitting PE-S2 45G d160/135 welded	3.354	3.99
308.051.14.1	brnFtg f waste ftg PE-S2 90G d90/56 le	0.745	0.89
308.052.14.1	brnFtg f waste ftg PE-S2 90G d90/56 ri	0.766	0.91
305.058.14.1	branch fitting PE-S2 88.5G d56/56	0.198	0.24
306.058.14.1	branch fitting PE-S2 88.5G d63/56	0.215	0.26
306.068.14.1	branch fitting PE-S2 88.5G d63/63	0.219	0.26
307.058.14.1	branch fitting PE-S2 88.5G d75/56	0.283	0.34
307.068.14.1	branch fitting PE-S2 88.5G d75/63	0.300	0.36
307.078.14.1	branch fitting PE-S2 88.5G d75/75	0.315	0.37
308.058.14.1	branch fitting PE-S2 88.5G d90/56	0.525	0.62
308.068.14.1	branch fitting PE-S2 88.5G d90/63	0.550	0.65
308.078.14.1	branch fitting PE-S2 88.5G d90/75	0.536	0.64
308.088.14.1	branch fitting PE-S2 88.5G d90/90	0.606	0.72
310.058.14.1	branch fitting PE-S2 88.5G d110/56	0.789	0.94
310.068.14.1	branch fitting PE-S2 88.5G d110/63	0.801	0.95
310.078.14.1	branch fitting PE-S2 88.5G d110/75	0.795	0.95
312.108.14.1	branch fitting PE-S2 88.5G d135/110	1.381	1.64
312.128.14.1	branch fitting PE-S2 88.5G d135/135	1.399	1.66
315.148.14.1	branch fitting PE-S2 88.5G d160/160	2.350	2.80
315.108.14.1	branch fitting PE-S2 88.5G d160/110	2.344	2.79
315.128.14.1	branch fitting PE-S2 88.5G d160/135	2.360	2.81
308.089.14.1	brnFtg swept entry PE-S2 88.5G d90/90	0.676	0.80
310.088.14.1	brnFtg swept entry PE-S2 88.5G d110/90	0.926	1.10
310.108.14.1	brnFtg swept entry PE-S2 88.5G d110/110	1.091	1.30
312.109.14.1	brnFtg swept entry PE-S2 88.5G d135/110	1.128	1.34
308.082.14.1	brnFtg s/e 2x PE-S2 88.5G d90/90	0.778	0.93
310.102.14.1	brnFtg s/e 2x PE-S2 88.5G d110/110	1.107	1.32
308.083.14.1	corner brnFtg (s/e) PE-S2 88.5G d90/90	0.798	0.95
310.083.14.1	corner brnFtg (s/e) PE-S2 88.5G d110/110	1.080	1.29

Article number	Product description	Net weight [kg per item]	GWP-fossil, A1-A3 [kg CO <sub>2</sub> e/item]
308.480.14.1	breeches branch PE-S2 2x90G d90/90	0.515	0.61
310.481.14.1	breeches branch PE-S2 2x90G d110/90	0.622	0.74
308.811.14.1	Comb branch PE-S2 d90/90/56 Sh-Elem Toil	1.004	1.19
310.811.14.1	Comb branch PE-S2 d110/90/56 Sh-Elem Toi	1.344	1.60
310.813.14.1	Comb branch PE-S2 d110/110/56 Sh-ElemToi	1.451	1.73
308.817.14.1	Comb corner brnFtg PE-S2 d90/90/56 le	0.999	1.19
310.817.14.1	Comb corner brnFtg PE-S2 d110/90/56 le	1.344	1.60
310.117.14.1	Comb corner brnFtg PE-S2 d110/110/56 le	1.455	1.73
308.815.14.1	Comb corner brnFtg PE-S2 d90/90/56 ri	1.001	1.19
310.815.14.1	Comb corner brnFtg PE-S2 d110/90/56 ri	1.340	1.59
310.115.14.1	Comb corner brnFtg PE-S2 d110/110/56 ri	1.445	1.72
308.081.14.1	parallel branch PE-S2 45G d90/90	0.986	1.17
310.081.14.1	parallel branch PE-S2 45G d110/90	1.342	1.60
310.101.14.1	Geberit Silent-db20 parallel branch fitt	1.525	1.81
310.050.14.1	reducer PE-S2 d110/56 L11 eccentric	0.330	0.39
310.060.14.1	reducer PE-S2 d110/63 L11 eccentric	0.328	0.39
310.070.14.1	reducer PE-S2 d110/75 L11 eccentric	0.329	0.39
310.080.14.1	reducer PE-S2 d110/90 L11 eccentric	0.354	0.42
312.100.14.1	reducer PE-S2 d135/110 L11 eccentric	0.486	0.58
312.125.14.1	reducer PE-S2 d135/125 L11 eccentric	0.458	0.55
315.100.14.1	reducer PE-S2 d160/110 L12.6 eccentric	0.740	0.88
315.126.14.1	reducer PE-S2 d160/135 L13.5 eccentric	0.769	0.92
306.050.14.1	reducer PE-S2 d63/56 L8 eccentric short	0.082	0.10
307.050.14.1	reducer PE-S2 d75/56 L8 eccentric short	0.100	0.12
307.060.14.1	reducer PE-S2 d75/63 L8 eccentric short	0.103	0.12
308.050.14.1	reducer PE-S2 d90/56 L8 eccentric short	0.160	0.19
308.060.14.1	reducer PE-S2 d90/63 L8 eccentric short	0.164	0.20
308.070.14.1	reducer PE-S2 d90/75 L8 eccentric short	0.165	0.20
310.052.14.1	reducer PE-S2 d110/56 centr	0.321	0.38
310.062.14.1	reducer PE-S2 d110/63 centr	0.325	0.39
310.072.14.1	reducer PE-S2 d110/75 centr	0.332	0.40
310.082.14.1	reducer PE-S2 d110/90 centr	0.363	0.43
312.004.14.1	reducer PE-S2 d135/125 centr	0.500	0.60
310.106.14.1	reducer PE-S2 d125/110 centr	0.497	0.59

## VERIFICATION STATEMENT

### VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier. The process involved reviewing results, documents and compliance with the reference standards, ISO 14025, ISO 14040 and ISO 14044 following the process and checklists of the programme operator for:

- This Environmental Product Declaration
- The Life Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? [Read more online.](#)

This EPD has been generated by the One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

### THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Magaly González Vázquez, as an authorised verifier acting for EPD Hub Limited

20 August 2024

